



- **Compact design, Easy to handle.**
- **Turf Tires**
- **Telescopic Boom as standard.**
- **Kubota Engine**
- **Electrical parking as standard.**
- **Optional Rear Hydraulic Output.**
- **Great maneuverability**
- **Sound alarm**
- **High-flow auxiliary hydraulics**
- **Mini Bobcat plate / Avant plate**
- **CE, FOPS & ROPS Certified**

Model	DY620
Dimension (LxWxH)	2195mm*980mm*2150mm
Max. reach(boom extended)	2750mm (108")
Max. reach(boom retracted)	2150mm (84")
Bucket capacity	300L
Rated loading capacity	500-800kg (1102- 1765lbs)
Min. turning radius	1980mm
Turning angle	40 Degree
Speed	10km/h
Weight	1100kg (2425lbs)
Standard tire	23X8.5-12
Tire pressure	2.8 bar
Oil tank capacity	35L
Pressure	190bar
Working oil flow	33L/min (8.7 gal/m)
Tracking oil flow	50L/min (13.2 gal/m)
Oil model(mineral oil)	L-HL46
Fuel tank capacity	18L
Battery capacity	55Ah
Voltage	12v

Shelter Structures America


405 Via Chico, Suite 1

Palos Verdes Estates, CA 90274

424-254-9172

www.Shelterstructuresamerica.com

sales@wilddogequipment.com

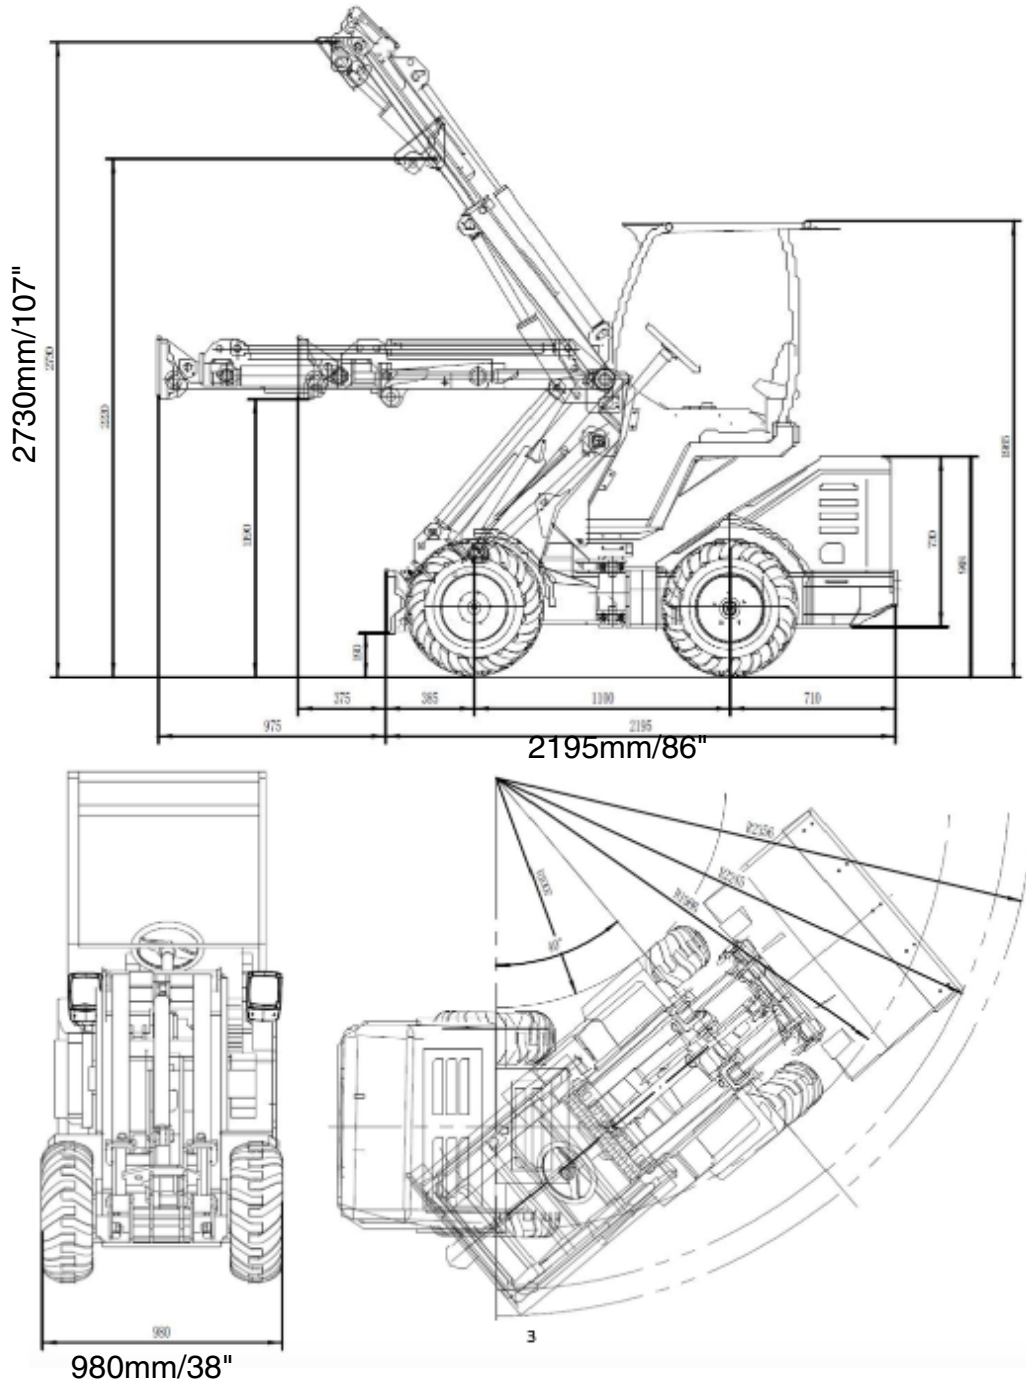

Shelter Structures America
405 Via Chico, Suite 1
Palos Verdes Estates, CA 90274

424-254-9172

www.Shelterstructuresamerica.com

sales@wilddogequipment.com